

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number  
WO 2004/064977 A1

- (51) International Patent Classification<sup>7</sup>: B01D 21/18, (74) Agent: KANGASMÄKI, Reljo; Finnish Patent Consulting FPC, Herrmankatu 14, FIN-33720 Tampere (FI).
- (21) International Application Number: PCT/FI2003/000953
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 15 December 2003 (15.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (30) Priority Data: 20030110 24 January 2003 (24.01.2003) FI
- (71) Applicant (*for all designated States except US*): FINN-KETJU INVEST OY [FI/FI]; Rekitie 1, FIN-26510 RAUMA (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): TUOMIKOSKI, Pekka [FI/FI]; Puuluntie, FIN-26410 KAARO (FI).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: AUXILIARY SCRAPER ARRANGEMENT

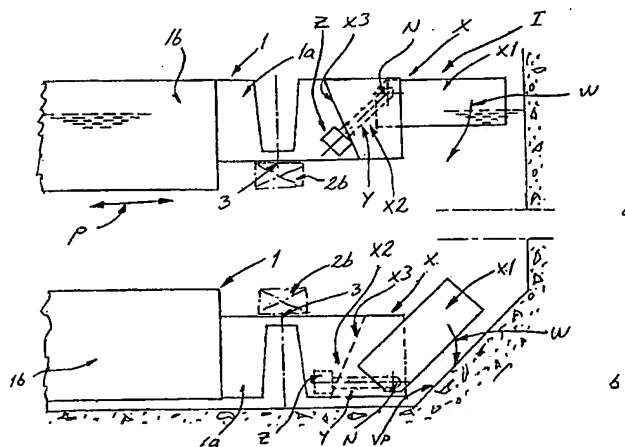

(57) Abstract: The invention relates to an auxiliary scraper arrangement, intended particularly for enhancing a scraping process performed by a scraper bar assembly in a liquid tank, such as a settling tank or the like. The auxiliary scraper arrangement (X) comprises one or more extensions (X1), driven in response to actuators (X2) to two or more working positions (I, II) different from each other relative to the scraping bar (1) during its movement in the liquid tank. In the first working position, the extension (X1) is intended for scraping the supernatant sludge present on the wall of the tank, while the scraper bar (1) is at the liquid surface. In the second position, the extension is intended for scraping the sludge present on an inclined surface (VP) at the bottom of the tank while the scraper is upside down at the bottom of the tank. The actuators (X2) are provided with a gravitationally powered mechanism, including the extension (X1) which is connected at an articulation (N) pivotally (w) to the scraper bar (1), the extension (X1) having a counterweight (z) coupled therewith on the opposite side of the articulation (N) by way of a lever arm (y).